

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF FANNAL AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF FANNAL AND MUST BE RETURNED TO FANNAL UPON ITS REQUEST



SPEC. NUMBER  
AM-0840001A

PRODUCT GROUP  
TFT- LCM

REV.  
V2

ISSUE DATE  
2023-2-2

PAGE  
1 OF 22

FN0840D001A

## Product Specification Rev.V2

BUYER	
SUPPLIER	FANNAL Electronics CO., LTD
FG-Code	FN0840D001A


☐ Preliminary Specification

☒ Approval Specification

ITEM	BUYER SIGNATURE	DATE
_____	_____	_____
_____	_____	_____
_____	_____	_____

ITEM	SUPPLIER SIGNATURE	DATE
Prepared	<u>    Xiong    </u>	<u>2023-2-2</u>
Reviewed	<u>    Dong    </u>	<u>2023-2-2</u>
Approved	<u>    JACK    </u>	<u>2023-2-2</u>



PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 3 OF 22

## Contents

No.	Items	Page
1.0	General Description	4
2.0	Mechanical Drawing	5
3.0	Absolute Maximum Ratings	6
4.0	Electrical Specifications	7
5.0	Interface Description	8
6.0	Optical Specifications	12
7.0	Reliability Test	14
8.0	Precautions	15
9.0	Packing Information	19
10.0	Visual Inspection Criteria For All Customers	20

PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification			PAGE 4 OF 22
<b>1.0 General Description /一般说明</b>				
<b>1.1 Application /应用</b>				
<div><input checked="" type="checkbox"/> Industrial</div> <div><input type="checkbox"/> Automotive</div> <div><input type="checkbox"/> Medical</div> <div><input type="checkbox"/> Outdoor highlight</div>				
<b>1.2 General Specification /通用技术条件</b>				
The followings are general specifications at the FN0840D001A				
Parameter	Specification	Unit	Remarks	
LCD size	8.4(Diagonal)	inch		
Number Of Pixels	1024(H)×768(V)	pixels		
Pixel Pitch	0.1668(H)RGB×0.1668(V)	mm		
Active Area	170.8032(H)×128.1024(V)	mm		
Display Mode	Normally Black			
Module Size	203.0(W)×145.9(H)×9.4(D)	mm		
Interface	LVDS			
View direction	ALL			
Display colors	16.7M	colors		
Backlight Consumption	5.0	W		
Surface treatment	Anti-Glare			
Weight	245	g		
Luminance	1000(TYP.)	cd/m²		
Driver IC	ST5821+ST5084			

## 2.0 Mechanical Drawingr /机械制图

**TECHNOLOGY CHARACTERISTICS LCM**

SIZE	8.4 inch
Resolution ratio	1024x768
Display mode	Transmissive Normally Black
Display direction	<input type="checkbox"/> 6 <input type="checkbox"/> 12 <input type="checkbox"/> 3 <input type="checkbox"/> 9 <input checked="" type="checkbox"/> Free
Contrast ratio	1000:1
Luminance	1000 typ 800(MIN)
Uniformity	80% MIN
Interface	LVDS 20P
Power supply	<input checked="" type="checkbox"/> 3.3 <input type="checkbox"/> 5.0
Operation temperature	-20~70℃
Storage temperature	-30~80℃
Driver IC	ST5821+ST5084
Connection mode	<input type="checkbox"/> FPC Plug-in <input type="checkbox"/> FPC Welded <input checked="" type="checkbox"/> Connector
Environmental requirements	<input checked="" type="checkbox"/> RoHS-2.0 <input type="checkbox"/> REACH
Unmarked tolerance	±0.2mm

**TOP VIEW**

DOTS 1024xRGBx768  
VIEW DIRECTION: ALL

**SIDE VIEW**

**BOTTOM VIEW**

**PULL TAPE**

**Backlight LED Circuit**  
(LED SMD 3\*9 = 27 dies)  
If= 180 mA VF=25.2~28.8V

**Fannal Bar code rules:**

Fannal Model: FN0840D001A  
9号黑体加粗  
Bar code height: 4.1  
Date Code: 20220719

FN LOGO  
Microsoft Yahei UI  
7号加粗斜体  
7号宋体  
Serial Number: 0016-0001  
<样品阶段默认00000000>

**CON 1**

PIN	FUNCTION
1	VCC3.3V
2	VCC3.3V
3	CS
4	NC
5	RXIN1-
6	RXIN1+
7	GND
8	RXIN2-
9	RXIN2+
10	GND
11	RXIN3-
12	RXIN3+
13	GND
14	RXCLKIN-
15	RXCLKIN+
16	GND
17	NC
18	NC
19	RXIN4-
20	RXIN4+

**CON 2**

PIN	FUNCTION
1	VLED 12V
2	GND
3	PWM
4	PWM


**AMENDMENT**

VER.	SYMBOL	AMENDMENT	SIGN	DATE
AQ02	△	1. Add a Label rule; 2. modify the backplane lock position and connector position size (away from the connector solder spot)	JACK	2022-07-29
A	△	First issue	JACK	2022-4-8

**DRAWN**: LCF  
**CHECKED**: XIONG  
**APPROVED**: JACK  
**CSR APPROVED**:  
**Customer No.**:

**TITLE**: MODULE SPEC.  
**Drawing NO.**: FN0840D001A  
**Project No.**:

**FANNAL ELECTRONICS CO., LTD**

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 6 OF 22


**3.0 ABSOLUTE MAXIMUM RATINGS /绝对最大额定值**

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit.

Parameter	Symbol	Min.	Max.	Unit
Power Supply Voltage	VDD	-0.3	3.6	V
Operating Temperature	T <sub>OP</sub>	-20	+70	°C
Storage Temperature	T <sub>ST</sub>	-30	+80	°C
Humidity	RH	--	90%(Max60 °C)	RH

Notes:

- 1. If the module is above these absolute maximum ratings. It may become permanently damaged. Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability.
- 2. VCC > VSS must be maintained.
- 3. Please be sure users are grounded when handing LCD Module.
- 4. The response time will become lower when operated at low temperature.
- 5. Background color changes slightly depending on ambient temperature.  
The phenomenon is reversible.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 7 OF 22

## 4.0 ELECTRICAL SPECIFICATIONS/电气规范

### 4.1 TFT LCM Module

[Ta =25±2 °C]


Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power supply voltage	VDD	3.0	3.3	3.6	V	
Input logic high voltage	VIH	0.7VDD	-	VDD	V	
Input logic low voltage	VIL	0	-	0.3VDD	V	
Clock Frequency	FCLK	48.4	52.4	61.5	MHz	

### 4.2 Backlight Driving Conditions

Parameter	Symbol	Values			Unit	Notes [Ta =25±2 °C]
		Min.	Typ.	Max.		
Input Voltage	VLED	-0.3	12.0	12.5	V	Note 1
Input Current	ILED	-	450	-	mA	VIN=12V
PWM Duty	Duty	10		100	%	-
PWM Freq	Freq	5		20	KHZ	-
V PWM H	PWMH	1.2	-	-	V	VIN=3~18V
V PWM L	PWML	-	-	0.4	V	VIN=3~18V
LED Life Time	-	-	50000	-	Hrs	Note 2

Note1: Under LCM operating, the stable forward current should be inputted. And forward voltage is for reference only.

Note2: If LED is driven by high current, high ambient temperature & Humidity condition. The life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 8 OF 22


5.0 Interface Description/接口说明

Connector Name/Designation	Interface Connector/Interface Card
Type Part Number	DF19K-20P-1H(52)
Mating Housing Part Number	DF19-20S-1C

5.1 Pin assignment for LCM module /模组引脚分配

Pin No.	Symbol	Description
1-2	VCC	Power Supply Logic voltage(+3.3V)
3	SC	Scan direction control (Low=Normal, High=Reverse)
4	NC	No Connect
5	RXIN1-	Negative LVDS differential data input
6	RXIN1+	Positive LVDS differential data input
7	GND	Ground
8	RXIN2-	Negative LVDS differential data input
9	RXIN2+	Positive LVDS differential data input
10	GND	Ground
11	RXIN3-	Negative LVDS differential data input
12	RXIN3+	Positive LVDS differential data input
13	GND	Ground
14	RXCLKIN-	Negative LVDS differential data input
15	RXCLKIN+	Positive LVDS differential data input
16	GND	Ground
17-18	NC	No Connect
19	RXIN4-	Negative LVDS differential data input
20	RXIN4+	Positive LVDS differential data input



PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 9 OF 22


5.2 Pin assignment for Backlight/背光引脚分配

Connector Name/Designation	Interface Connector/Interface Card
Type Part Number	A1254AWR-04-F1KC1-R(BJD)
Mating Housing Part Number	H208K-P04N-02B

Pin No.	Symbol	Description
1	VLED	Power Supply Input Voltage for LED Driver(+12V)
2	GND	GND for LED Driver
3	PWM	Dimming control
4	PWM	Dimming control

## 5.2 Interface timing Parameter /接口时序参数


### The relationship between LVDS signals and RSTB / STBYB

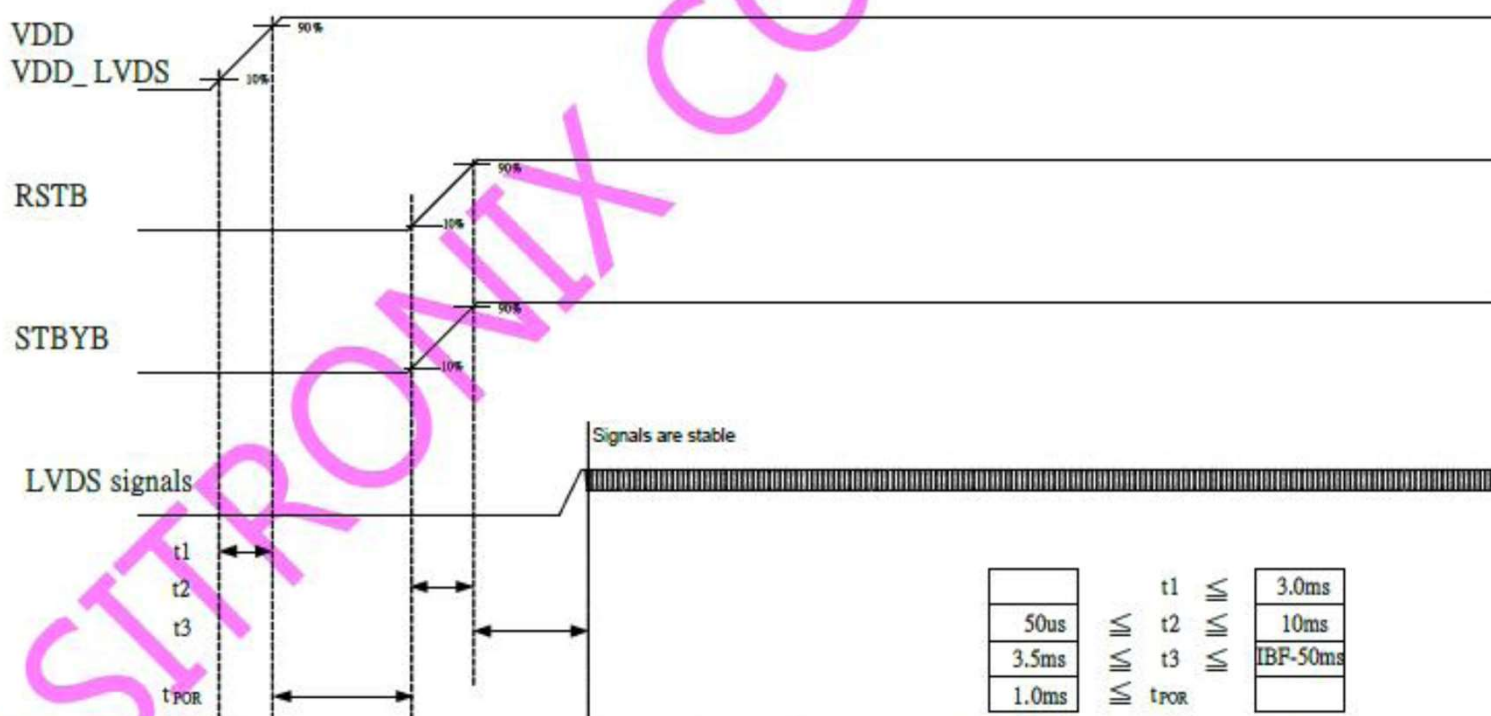

Please keep LVDS frequency the same and do not stop LVDS signals during power on period.

1024x768 (RES[3:0] = 0111)

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
CLK frequency	t <sub>CLK</sub>	48.4	52.4	61.5	Mhz	
Horizontal blanking time	t <sub>HBT</sub>	20	56	180	t <sub>CLK</sub>	t <sub>HBP</sub> + t <sub>HFP</sub>
Horizontal back porch	t <sub>HBP</sub>	5	5	180- t <sub>HFP</sub>	t <sub>CLK</sub>	
Horizontal display area	t <sub>HD</sub>	1024	1024	1024	t <sub>CLK</sub>	
Horizontal front porch	t <sub>HFP</sub>	15	51	175	t <sub>CLK</sub>	
Horizontal period	t <sub>H</sub>	1044	1080	1204	t <sub>CLK</sub>	
Horizontal pulse width	t <sub>HPW</sub>	1	1	256	t <sub>CLK</sub>	
Vertical blanking time	t <sub>VB</sub>	5	40	83	t <sub>H</sub>	t <sub>VB</sub> + t <sub>VFP</sub>
Vertical back porch	t <sub>VBP</sub>	2	2	83- t <sub>VFP</sub>	t <sub>H</sub>	
Vertical display area	t <sub>VD</sub>	768	768	768	t <sub>H</sub>	
Vertical front porch	t <sub>VFP</sub>	3	38	81	t <sub>H</sub>	
Vertical period	t <sub>V</sub>	773	808	851	t <sub>H</sub>	
Vertical pulse width	t <sub>VPW</sub>	1	1	128	t <sub>H</sub>	

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 11 OF 22


## 6.0 OPTICAL SPECIFICATIONS /光学规格

### 6.1 Overview /概述


The test of optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$ lux and temperature =  $25 \pm 2^{\circ}\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\phi$  equal to  $0^{\circ}$ . We refer to  $\theta\phi=0$  ( $=\theta 3$ ) as the 3 o'clock direction (the "right"),  $\theta\phi=90$  ( $=\theta 12$ ) as the 12 o'clock direction ("upward"),  $\theta\phi=180$  ( $=\theta 9$ ) as the 9 o'clock direction ("left") and  $\theta\phi=270$  ( $=\theta 6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\phi$ , the center of the measuring spot on the display surface shall stay fixed.

### 6.2 Optical Specifications /光学规格

Item	Symbol	Condition	Min	Typ.	Max	Unit	Note
Viewing Angle	$\theta_L$	$Cr \geq 10$	-	80	-	deg	<a href="#">Note 1</a>
	$\theta_R$		-	80	-		
	$\psi_T$		-	80	-		
	$\psi_B$		-	80	-		
Contrast Ratio	Cr	$\theta=0^{\circ}$	1000	1200	-	-	<a href="#">Note 2</a>
Response Time	Tr+Tf	FF= $0^{\circ}$	--	--	35	ms	<a href="#">Note 3</a>
Color Coordinate of CIE1931	Wx	$\theta=0^{\circ}$	0.273	0.303	0.333	-	<a href="#">Note 4</a>
	Wy		0.289	0.319	0.349		
	Rx		0.583	0.613	0.643		
	Ry		0.329	0.359	0.389		
	Gx		0.277	0.307	0.337		
	Gy		0.544	0.574	0.604		
	Bx		0.117	0.147	0.177		
	By		0.046	0.076	0.106		
Uniformity	U		80	--	--	%	<a href="#">Note 5</a>
Color Gamut			--	60	--	%	
Luminance	L		800	1000	--	cd/m <sup>2</sup>	<a href="#">Note 6</a>

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 12 OF 22

**Note 1:The definition of Viewing Angle**  
Refer to the graph below marked by  $\theta$  and  $\phi$ .

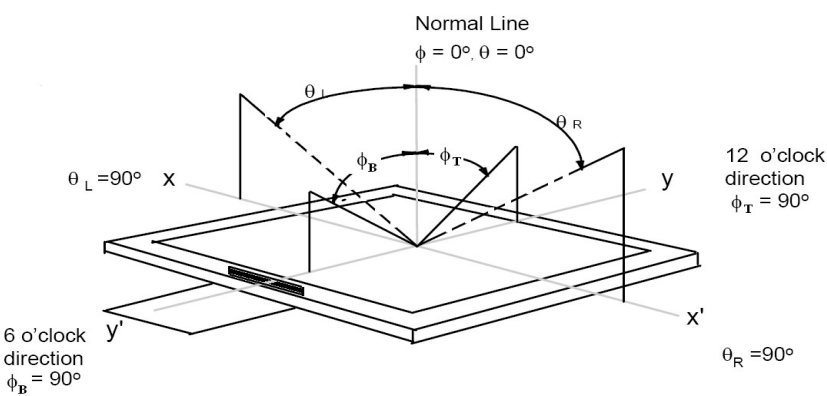

**Note2:The definition of Contrast Ratio**

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance When LCD is at "White" state}}{\text{Luminance When LCD is at "Black" state}}$$



(Contrast Ratio is measured in optimum common electrode voltage)


**Note3:Definition of Response time.**(Test LCD using RD80S or similar equipments):  
The output sign also photo detector are measured when the input sign also are changed from "black" to "white" (Voltage falling time) and from "white" to "black" (Voltage rising time), respectively . The response time is defined as the time interval between the 10% and 90% of amplitudes . Refer to figures below.

**Note 4: Color Coordinates of CIE 1931**  
The test condition is at ILED=20mA and measured on the surface of LCD module at 25°C.  
Measurement equipment:CS2000 or similar equipments  
The Color Coordinate (CIE 1931) is the measurement of the center of the display shown in below figure.

**Note 5: Definition of Color of CIE Coordinate and NTSC Ratio.**

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

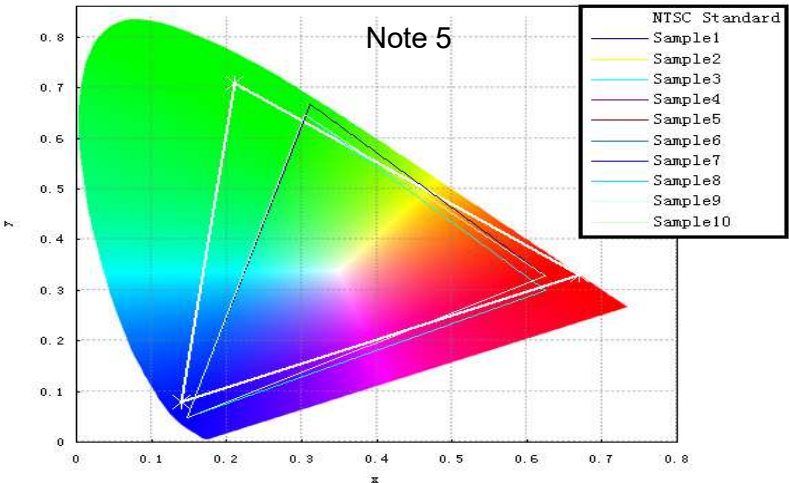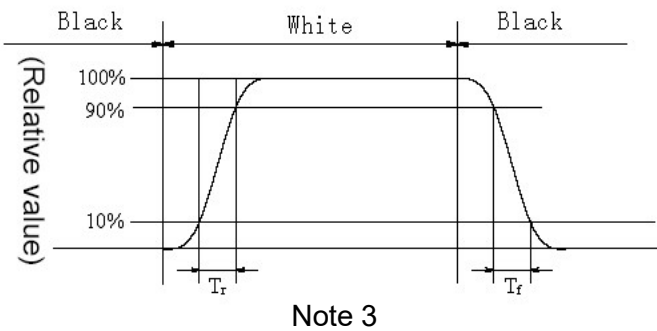


PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 13 OF 22

## 7.0 RELIABILITY TEST /可靠性测试

The Reliability test items and its conditions are shown in below.

No	Test Items	Conditions	Testing standard
1	High temperature storage test	80°C 240hr	IEC60068-2-1:2007 GB2423.2-2008
2	Low temperature storage test	-30°C 240hr	
3	Low temperature operation test	-20°C 240hr	
4	High temperature operation test	70°C 240hr	
5	High temperature & humidity (storage test)	60°C 90%RH 240hr	IEC60068-2-78:2001 GB/T2423.3-2006
6	Thermal Shock Test	-30°C~80°C 1hr/cycle 10cycle	Start with cold temperature End with high temperature IEC60068-2-14:1984, GB2423.22-2002
7	Vibration Test	10Hz-55Hz 100m/s <sup>2</sup> 120min	IEC60068-2-32:1990 GB/T2423.8-1995
8	Mechanical shock	100G ±X, ±Y, ±Z, 3times for each direction	
9	Dropping test	Height: 60 cm, 1 corner, 3 edges, 6 surfaces	
10	ESD test	C=150pF, R=330 Ω, 5 points/panel Air:±8KV, 5 times; Contact: ±4KV, 5 times;	IEC61000-4-2:2001 GB/T17626.2-2006 Class C




PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 14 OF 22

## • **8.0 Precautions /注意事项**

• Please pay attention to the followings when you use this TFT LCD Panel.

### • **8.1 Mounting Precautions /安装注意事项**

- (1) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (2) You must mount a module using specified mounting holes (Details refer to the drawings).
- (3) Please make sure to avoid external forces applied to the Source PCB or FPC and D-IC during the process of handling or assembling. If not, It causes panel damage or malfunction.
- (4) Note that polarizers are very fragile and could be easily damaged. Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
- (5) Do not pull or fold the source D-IC which connect the source PCB or FPC and the panel.
- Do not pull or fold the LED wire.
- (6) After removing the protective film, when the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with alcohol or purified water.
- Do not strong polar solvent because they cause chemical damage to the polarizer.
- (7) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (8) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (9) Since the LCD is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass may be broken.
- (10) Do not disassemble the module.
- (11) To determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- (12) If the customer's set presses the main parts of the LCD, the LCD may show the abnormal display. But this phenomenon does not mean the malfunction of the LCD and should be pressed by the way of mutual agreement.
- (13) Do not drop water or any chemicals onto the LCD's surface.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 15 OF 22


## 8.2 Operating Precautions /操作注意事项

- (1) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (2) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- (3) The electrochemical reaction caused by DC voltage will lead to LCD degradation, so DC drive should be avoided.
- (4) The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.
- (5) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.
- (6) Design the length of cable to connect between the connector for back-light and the converter as short as possible and the shorter cable shall be connected directly.  
The longer cable between that of back-light and that of converter may cause the luminance of LED to lower and need a higher startup voltage(Vs).
- (7) Connectors are precise devices for connecting PCB and transmitting electrical signals. Operators should insert and unplug MDL in parallel when assembling MDL.
- (8) Do not connect or disconnect the cable to/ from the module at the "Power On" condition.
- (9) When the module is operating, do not lose CLK, ENAB signals. If any one these signals is lost, the LCD panel would be damaged.
- (10) Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- (11) Do not re-adjust variable resistor or switch etc.
- (12) For the Q/Single/OC Product, If the LED designed side view, LED bar should be putted in the Long/short side ; Otherwise, its reliability and function may not be guaranteed.

注：  
 ①(1)涉及到Pol相关条目适用于OC/MDL出货产品，  
 ②(6)(7)涉及到connector相关适用于OC/MDL出货产品  
 ③ (12) 涉及到客户进行BLU设计，LED Bar位置需要避开GOA位置；

## 8.3 Electrostatic Discharge Control /静电放电控制

- (1) Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly. Keep products as far away from static electricity as possible.
- (2) Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 16 OF 22


#### 8.4 Precautions for Strong Light Exposure /强光照射注意事项

It is not allowed to store or run directly in strong light or in high temperature and humidity for a long time; Strong light exposure causes degradation of polarizer and color filter.

#### 8.5 Storage Precautions /存储注意事项

When storing modules as spares for a long time, the following precautions are necessary.

- (1) The polarizer surface should not come in contact with any other object.  
It is recommended that they be stored in the container in which they were shipped.  
Temperature : 5 ~ 40 °C
- (2) Humidity : 35 ~ 75 %RH
- (3) Period : 6 months
- (4) Control of ventilation and temperature is necessary.
- (5) Please make sure to protect the product from strong light exposure, water or moisture.  
Be careful for condensation.
- (6) Store in a polyethylene bag with sealed so as not to enter fresh air outside in it.
- (7) Do not store the LCD near organic solvents or corrosive gasses.
- (8) Please keep the Modules/OC/FOG at a circumstance shown below Fig.



#### 8.6 Precautions for Protection Film /保护膜注意事项

- (1) Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- (2) In handling the LCD, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary.

#### 8.7 Appropriate Condition for Display /适当的显示条件


- (1) Normal operating condition
  - Temperature: 0 ~ 40°C
  - Operating Ambient Humidity : 10 ~ 90 %
  - Display pattern: dynamic pattern (Real display)
  - Suitable operating time: under 12 hours a day.


- (2) Special operating condition

If the product will be used in extreme conditions such as high temperature, humidity, display patterns or 7\*24hrs operation time etc., It is strongly recommended to contact us for Application engineering advice. Otherwise, its reliability and function may not be guaranteed.

- (3) Black image or moving image is strongly recommended as a screen save.




PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2023-2-2	
SPEC. NUMBER	SPEC. TITLE			PAGE
AM-0840001A	FN0840D001A Product Specification			17 OF 22
<ul style="list-style-type: none"><li>• (4) Lifetime in this spec. is guaranteed only when commercial display is used according to operating usages.</li><li>• (5) Please contact us in advance when you display the same pattern for a long time.</li><li>• (6) If the Module keeps displaying the same pattern for a long period of time, the image may be “sticked“ or “turn off” to the screen. To avoid image sticking, it is recommended to use a screen saver.</li><li>• (7) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.</li><li>• (8) Dew drop atmosphere should be avoided.</li><li>• (9) The storage room should be equipped with a good ventilation facility and avoid to expose to corrosive gas , which has a temperature controlling system.</li><li>• (10) The LCD should be avoided to expose to corrosive gas for long time, ,the LCD may be affected by the gas as SO2 ,H2S etc.</li><li>• (11) When expose to drastic fluctuation of temperature (hot to cold or cold to hot) ,the LCD may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD's surface which may affect the operation of the polarizer and the LCD.</li><li>• (12) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD may turn black at temperature above its operational range. However those phenomena do not mean malfunction or out of order with the LCD. The LCD will revert to normal operation once the temperature returns to the recommended temperature range for normal operation</li></ul>				
<b>8.8 Others /其他</b>				
<b>A. LC Leak /液晶泄露</b>				
<ul style="list-style-type: none"><li>• If the liquid crystal material leaks from the panel, it is recommended to wash the LC with acetone or ethanol and then burn it.</li><li>• In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.</li><li>• If LC in mouth, mouth need to be washed, drink plenty of water to induce vomiting and follow medical advice.</li><li>• If LC touch eyes, eyes need to be washed with running water at least 15 minutes.</li></ul>				
<b>B. Rework /返工</b>				
<ul style="list-style-type: none"><li>• When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.</li></ul>				
<b>C. In order to prevent potential problems, flicker should be adjusted by optimizing the Vcom value in customer LCM Line (适用于Q/Single/OC出货产品)</b>				

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE OF 22

**9.0 PACKING INFORMATION(产品形态: LCM )**

**TBD**


PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 19 OF 22

## 10.0 VISUAL INSPECTION CRITERIA FOR ALL CUSTOMERS /所有客户的目视检查标准

### 10.1 Sampling Method /抽样方法

Unless otherwise agreed upon in writing, the sampling inspection shall be applied to the Customers incoming inspection.

- 10.1.1 Lot size : 1 pallet per same model
- 10.1.2 Sampling type : Random sampling
- 10.1.3 Inspection level : II
- 10.1.4 Sampling table : MIL-STD-105E

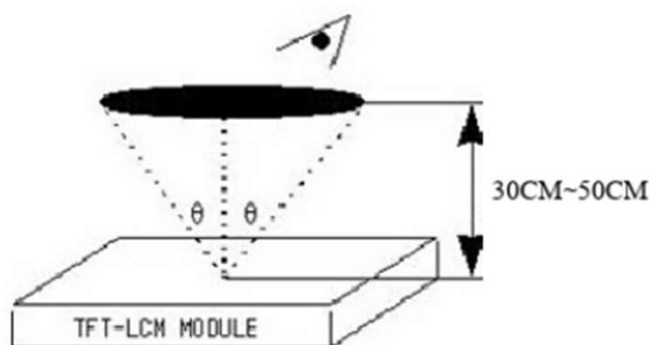

### 10.2 Inspection Environment /检验环境

#### 10.2.1 Ambient conditions

- a. Ambient Temperature:  $25 \pm 3^{\circ}\text{C}$
- b. Relative Humidity:  $65 \pm 20\% \text{RH}$
- c. Ambient Illumination: 300-700LUX (Normal: 500LUX)

#### 10.2.2 Viewing Distance

The distance between the LCM and the inspector's eyes shall be at least 30cm-50cm

#### 10.2.3 Viewing Angle

performing in front of the panel

[Vertical] :  $\pm 25^{\circ}$

[Horizontal] :  $\pm 40^{\circ}$

#### 10.2.4 Inspection Area:

Display Area (Active Area)

### 10.3 Definitions /定义

#### 10.3.1 Dark / Bright Spots

Points on display which appear dark/bright and usually result from the contamination.

These defects do not vary in size or intensity (contrast) when contrast is varied.

#### 10.3.2 Dark / Bright Lines

Lines on display which appear dark/bright and usually result from the contamination.

#### 10.3.3 Polarizer Scratch


Lines on display which are seen across a darker background and do not vary in size.

#### 10.3.4 Polarizer Dent

White spots on display which appear against a darker background and do not vary in size.

#### 10.3.5 Bright Dot Defects

Dots (sub-pixels) on display which appear bright in the display area and visible through the 5%ND filter at Black Pattern.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 20 OF 22

#### 10.3.6 Dark Dot Defects

Dots(sub-pixels)on display which appear dark in the display area at R.G.B Color Pattern.

#### 10.3.7 Line Defects

All line defects on display which appear brigh/dark such as vertical,horizontal,or cross lines.

#### 10.3.8 Mura

Mura on display which appears darker/brighter against background birghtness on parts of display area.

#### 10.3.9 BM Defects

Bright(white)Points on display which are off BM(Black Matrix).

#### 10.3.10 Visual Inspection

Inspection for LCM when the unit turns on.

#### 10.3.11 Appearance Inspection

External inspection for LCM when the unit turns off.

#### 10.3.12 Other

Defects which cannot be classified into the above defect definitions.

Note 1: Bright& Dark dots are not smaller than a sub-pixel(Dots smaller than a sub-pixel are not counted as defect dots)

### 10.4 Inspectin Criteria /检验标准

Refer to 《TFT LCM general inspection standard》

### 10.5 Verification /验证

The supplier can verify the defective LCMs to segregate the responsibilities at customer's facility or can request the Customer to ship the defective LCMs to assigned place for verification


This verificatin result shall be agreed mutually buy the Customer and Supplier. This result can be corrected/changed after detail failure analysis at Supplier's facilities.

### 10.6 Supplier Induced Defects /供应商引起的缺陷

All of the Supplier induced defective LCMs shall be returned to the Supplier for repair or replacement.

Bfore return the defective LCMs, the Customer needs Supplier's confirmatin with RMA Number.

All of the returned LCMs shall be returned to the Customer within agreed time period.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2023-2-2	
SPEC. NUMBER AM-0840001A	SPEC. TITLE FN0840D001A Product Specification		PAGE 21 OF 22

#### 10.7 Customer Induced Defects /顾客引起的缺陷

The Customer can return the customer induced defective LCMs to the Supplier for repair.  
The repair cost for Customer induced defective LCMs shall be agreed with both parties, Customer and Supplier.

#### 10.8 Warranty Period /质量保证期

In-warranty period is Eighteen(18)Months from manufacturing month of LCM

Note :

- Eighteen months are composed of twelfth months in-warranty period and sixth months distribution period
- The manufacturing Month is on the LCMs as Supplier's serial No.

#### 10.9 Repair Warranty /维修保证书

Repair warranty is Twelve(12)Months from repaired month for repaired LCMs

Note : a. The Label for repair will be added after repairing.

#### 10.10 Warranty avoidance /避免担保

The warranty will be avoided in cases of below:

- When the warranty period is expired.
- The Customer induced defective LCMs.
- When the LCMs were repaired by 3rd party without Supplier's approval.
- When the LCMs were treated like Disassemble and Rework by the Customer and/or Customer's representatives without Supplier's approval.

#### 10.11 Others /其他

If any problems arise with the LCMs supplied by supplier, the customer and supplier will cooperate and make efforts to solve it with mutual confidence and respect